

"Products designed with SECURITY in mind"

# SECURCOMM

BY DC SECURITY PRODUCTS

# FLEXRACK MODEMCAGE

## 20 SLOTTED RACK MODEM ENCLOSURE

"Ultimate Flexibility" is our goal at DC Security Products and through our Securcomm Product Line we continue that aim by presenting the **FLEXRACK MODEMCAGE** model **FR20** Rack Mountable Modem Enclosures. The **FLEXRACK MODEMCAGE** series is the perfect compliment to the **FLEX** family of modem units. Together, they make up the **P.L.A.N.** (Proprietary Local Area Network) called **FLEX\*NET**. The abilities of the **FLEX** series of products and the use of **FLEXRACK MODEMCAGE** create the backbone of **FLEX\*NET**. The **FLEXRACK MODEMCAGE** is loaded with options, all developed to effectively perform in a new and / or existing Telco Leased Line / Dialup or as a Line Driver, designed to power a proprietary Dry Copper Campus **P.L.A.N.** environment. Securcomm's **FLEXRACK MODEMCAGE** is the centerpiece of **FLEX\*NET**, the dependable transmission solution for your hub or star-configured security communication needs. **FLEX\*NET** is the cost effective and time-tested alternative to LAN-based security networks, as well as offering more protection and greater control of your integrated security communication. Let us show you the power of **FLEX\*NET**.

Our Securcomm **FLEXRACK MODEMCAGE** was design to utilize the **UNIFLEX** Models **DC144** and **DC336**, the **QUADRAFLEX** Models **DC1444** and **DC3364**, the **OMNIFLEX MODEMS** Models **CL1444** and **CL3364**, along with the **DOWNLOADER MODEMS** Model **DL110**, all of which are important components in **FLEX\*NET**. The **MULTIFLEX CARD CAGE** is designed to last with all models equipped with power supplies touting a MTBF (Mean Time Between Failures) of 200,000 Hours.

## PRODUCT SPECIFICATIONS

### PHYSICAL:

#### ◆ FR20:

- Length 6.00 inches.
- Width 19.00 inches.
- Height 3.53 inches.
- Weight 9.00 Pounds.  
(Unpopulated)
- Weight 24.00 Pounds  
(Populated)

### POWER:

#### ◆ FR20:

- Auto Adjusts to 85-265VAC.

### POWER CONSUMSION :


- 40 Watts

### ENVIRONMENTAL (All Models);

- Temperature -20C To+70C.
- Humidity 90% non-condensing.

### APPROVALS (POWER SUPPLY):

- All Major Domestic and International Approvals

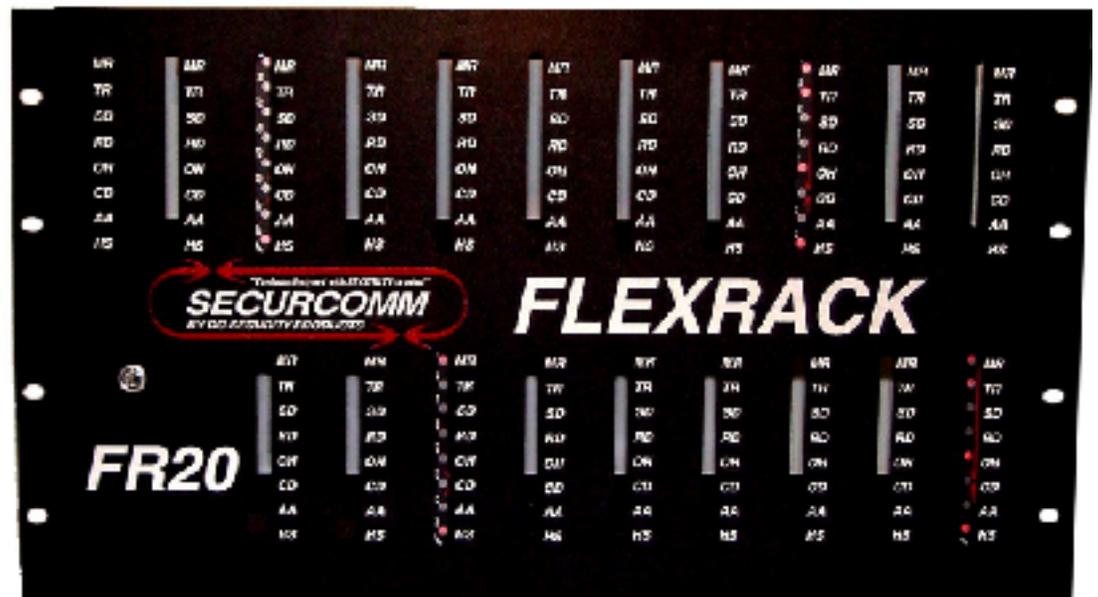

ONE LINDSAY CIRCLE  
SAN FRANCISCO, CALIFORNIA 94124  
Voice (415) 550-0443 Fax (415) 550-1780  
[www.dcsecurityproducts.com](http://www.dcsecurityproducts.com)